



## **Basic Information**

Place of Origin: ChinaBrand Name: Meklon

• Certification: ISO,MSDS,SGS

Model Number: P-602 Minimum Order Quantity: 200Boxes

• Price: 1.64USD-2.31USD

Packaging Details: Carton

• Delivery Time: 10-15 Work Day

• Payment Terms: T/T

Supply Ability: 500 boxes per day



# **Product Specification**

Brand: MeishiliankeCode: K-602

Name: Universal ThinnerColor: Transparent

Dry Time: Fast/Standard/Slow

Flash Point: 25°CType: LiquidNet Weight: 0.9KG

• Highlight: spraying single stage paint,

Automotive Lacquer Thinner Acid Resistant,

metallic 2k paint



# More Images





### **Product Description**

#### product description:

F-602 Universal Thinner is a low to medium quality thinner at a very affordable price for the price sensitive market. The following are the characteristics and performance of F-602 Universal Thinner:

Wide range of applications: F-602 Universal Thinner is suitable for many different types of automotive paints, including single coats and double coats, etc. It effectively thins the paint, making it easier to apply.

Good Thinning: F-602 Universal Thinner effectively thins paint, making it easier to apply while maintaining paint performance and quality. Quality Meets Demand: While F-602 Universal Thinner is classified as a low-to-medium quality product, it is still of acceptable quality for use in price-sensitive markets.

Affordable price: The price of F-602 Universal Thinner is very affordable, and the cost performance is relatively high, which is suitable for the market with high price requirements.


F-602 Universal Thinner is a thinner with wide application range, good thinning effect and fast drying. Although it is a low-to-medium quality product, its quality still meets the requirements, and the price is very affordable, and the price/performance ratio is relatively high, which is suitable for the market with higher price requirements.

#### Instructions:

Thinner + 1K color paint, then stir evenly and spray directly

#### **Precautions:**

- 1. The first thing to pay attention to when using car paint thinner is the use of safety issues. Car paint thinners are flammable and dangerous goods. They must be stored in a warehouse with air circulation and moderate temperature, and isolate fire and heat sources and prevent strong Eye exposure to avoid risk of burning.
- 2. After the thinner is added to the car paint, it must be stirred evenly until it reaches a suitable working viscosity before it can be used.
- 3. Be sure to operate in a well-ventilated environment, because the diluent contains toxic ingredients and emits a pungent smell.
- 4. Stay away from acidic substances, because they can chemically react with each other.
- 5. Do not mix different diluents with each other, dangerous chemical reactions will occur, and explosions will occur in severe cases
- 6. Thinner is a volatile substance, keep away from flammable items.
- 7. Wash your hands in time after use, so as not to leave a smell on your hands and affect your skin.

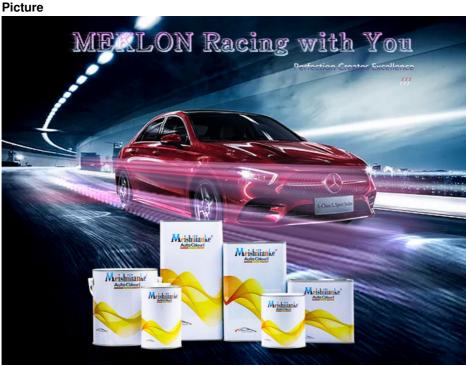





# Guangzhou Meklon Chemical Technology Co., Ltd.







refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong Province