



## Multiscene Nontoxic Auto Paint Primer , Acid Resistant Car Primer Spray Paint

Our Product Introduction

for more products please visit us on [refinishcarpaint.com](http://refinishcarpaint.com)

### Basic Information

- Place of Origin: China
- Brand Name: Meklon
- Certification: ISO,MSDS,SGS
- Model Number: M-501
- Minimum Order Quantity: 200L
- Price: 2.32USD/L-2.63USD/L
- Packaging Details: Carton
- Delivery Time: 10-15 Work Day
- Payment Terms: T/T
- Supply Ability: 500L per day



### Product Specification

- Brand: Meiguanda
- Code: M-501
- Name: Plastic Primer
- Color: Transparent
- Dry Time: 30 Minutes
- Indoor/Outdoor: Indoor/Outdoor
- Recoat Time: 2 Hours
- VOC Level: Low
- Highlight: car metal primer , automotive primer , car primer



### More Images



## Product Description

### Plastic Primer Low Softening Point Good Leveling Property

#### Performance and Features:

**Good adhesion:** The car plastic primer has good adhesion, can be firmly attached to the surface of the car body, and is not easy to fall off.

**Abrasion resistance:** Automotive plastic primer has strong abrasion resistance and can resist the scuffs and scratches of daily use.

**Weather resistance:** Automotive plastic primers have good weather resistance and can resist the influence of natural environments such as ultraviolet rays, oxidation and corrosion.

**Low softening point:** Automotive plastic primers have a low softening point and are able to dry quickly at lower temperatures.

**Good leveling property:** Automotive plastic primer has good leveling property, which can make the coating surface smooth and even. effect:

The primary function of an automotive plastic primer is to provide protection and aesthetics to the car. It can protect the surface of the body from the external environment, such as ultraviolet rays, oxidation and corrosion, etc., and can also provide a beautiful appearance for the body.

**Storage conditions:**

The following points should be paid attention to when storing automotive plastic primers:

It should be stored in a dry, ventilated and cool place, away from fire and high temperature environment.

Long-term storage should be avoided, and it is generally recommended to use it within 1 year.

The opened paint should be sealed and stored to prevent air from entering and affecting the quality.

#### Instructions:

Clean the surface of the car body to ensure that the surface is free of impurities such as oil and dust.

Use sandpaper or a sander to smooth the surface of the body.

Before painting the primer, it should be stirred evenly to ensure the quality of the paint.


Apply the primer to the surface of the body with a spray gun or roller.

After the primer is dry, the previous layer of paint can be applied.

Picture



# Plastic primer

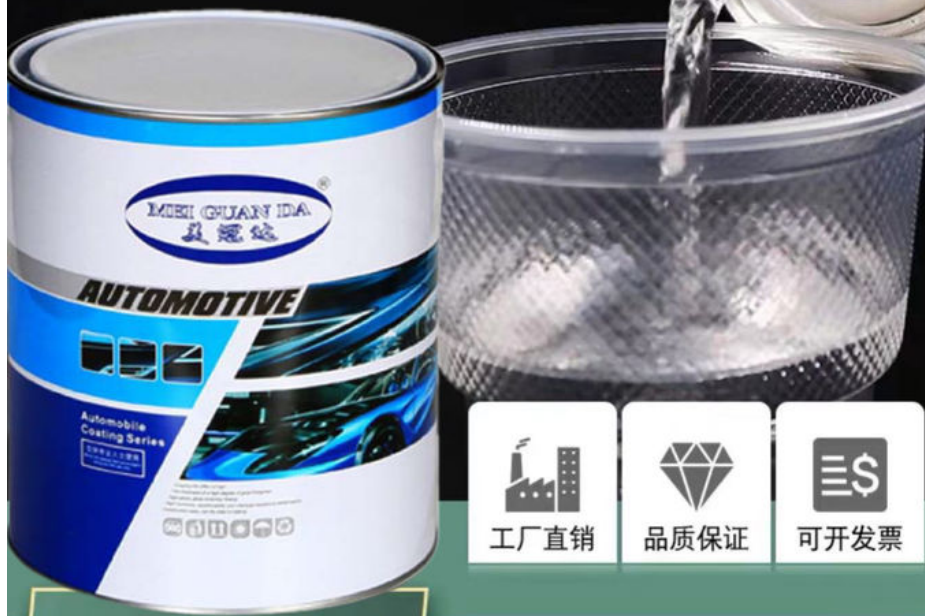

Guangzhou Meklon Chemical Technology Co., Ltd.

+8613392100968

Meklonpaint@gzmeklon.com

refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong Province