



Rose Red Car Paint Basecoat Anti Oxidation Multipurpose Durable And Wear-Resistant

Our Product Introduction

for more products please visit us on refinishcarpaint.com


Basic Information

- Place of Origin: GUANGDONG CHINA
- Brand Name: Ferrari series
- Certification: ISO,SGS,MSDS
- Model Number: F-131
- Minimum Order Quantity: 100Boxes
- Price: 3.26USD-5USD
- Packaging Details: 0.5L/1L/4L/10L/20L/200L
- Delivery Time: 7-15work days
- Payment Terms: T/T
- Supply Ability: 50000L/month



Product Specification

- Main Raw Materials: Acrylic Resin,Polyurethane Resin
- Feature: High Leveling,high Glossy,high Fullness,good Covering,high Adhesion
- Substrate: 1k Base Coat
- Transport Package: In Standard Export Cartons
- Dry Film Thickness: 1.5-2.0 Mills
- Certification: Pigment
- Mildew Resistant: Yes
- Color: 1K Rose Red
- Highlight: **Rose Red Car Paint Basecoat, Car Paint Basecoat Anti Oxidation, clear coat paint for car**

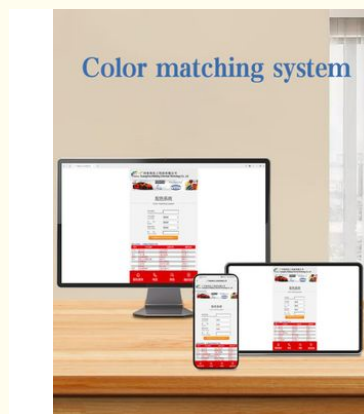

More Images



Product Description

Meklon, A Powerful Chinese Automotive Paint Manufacturer

Real customer feedback

Reliability of repair shops: precise color, strong coverage, perfect small repair/full vehicle spraying effect, outstanding weather resistance, and long-term use still bright as new, solving quality problems!

Recommended for modification players: Rich and unique colors (stunning metallic paint effect), fast leveling and drying during construction, greatly improving modification efficiency and overall vehicle texture!

Beauty chain thumbs up: Full and long-lasting paint color, high hardness and wear resistance, resistant to daily wear and tear; Thoughtful after-sales service, helping to boost customer satisfaction in stores, the first choice for long-term cooperation!

Car painting operation process

Surface treatment: Clean the vehicle body (remove dirt/oil/rust/old paint), polish to enhance adhesion, and cover areas that do not require spraying;

Paint mixing: Accurately mix paint, curing agent, and diluent according to the instructions, and stir thoroughly and evenly;

Spray gun setting: select the appropriate spray gun (gravity type is recommended), adjust the air pressure/paint output/spray form;

Spray painting technique: Hold the gun at a distance of 15-20cm perpendicular to the vehicle body, using the "Z-shaped/overlapping method" (covering 50% -60% of the front layer in a single pass), and extend from concealed areas (such as the inside of the car door) to prominent areas;

Multi layer spraying: Spray in batches, leaving drying time between layers - the first layer is sprayed with a "light mist" as a base to increase adhesion, and then thickened layer by layer to achieve the desired color/gloss;

Drying and curing: Natural air drying in a ventilated environment (duration adjusted with paint type/temperature), some paints need to be heated and cured;

Inspection and repair: After drying, check for defects such as sagging, orange peel, and particles. If necessary, lightly sandpaper and spray to improve.



Guangzhou Meklon Chemical Technology Co., Ltd.



+8613392100968



Meklonpaint@gzmeklon.com



refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong Province