



Heatproof Car Polyester Putty Multifunctional Chemical Resistant

Our Product Introduction

for more products please visit us on refinishcarpaint.com


Basic Information

- Place of Origin: China
- Brand Name: Meklon
- Certification: ISO,MSDS,SGS
- Model Number: P38
- Minimum Order Quantity: 50Boxes
- Price: 15.96USD-25.33USD
- Packaging Details: Carton
- Delivery Time: 10-15 Work Day
- Payment Terms: T/T
- Supply Ability: 500 boxes per day



Product Specification

- Brand: P38
- Name: Putty
- Specification: 3.8KG/can
- Use: Apply With A Spatula
- Shelf Life: 18months
- Highlight: 2k matt paint, tinting car paint, automotive paint sanding

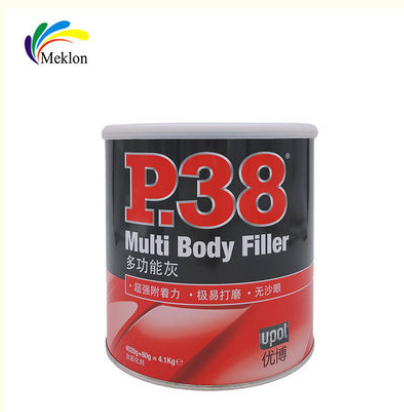

More Images



Product Description

Car Polyester Putty High Temp Resistant, Strong And Excellent Powder Adhesion product details:

Comparison between our products and ordinary products			
P38 Putty		Ordinary Putty	
High temp erature resistance:	Can withstand 180°C, no cracking, no blistering, no shedding, no discoloration	Low temp erature resistance:	Poor quality and cannot withstand high temperatures. Cracking, blistering, and discoloration have been considered
Strong adhesion:	Strength (level 1), not easy to fall off, strong durability	Poor adhesion:	Very easy to fall off, or fall off in a short period of time, poor durability:
Environmental :	Conforms to EU low volatile compound environmental standards	Pollution:	Produce benzene, formaldehyde, etc., which will cause great harm to workers' health and pollute the environment during the construction process.
Conductivity:	Easy to powder, for powder spraying, excellent powder absorption performance, uniform powder absorption	Conductivity:	Poor, poor electrostatic adsorption, not easy to absorb powder or paint
Filling:	Good, non-shrinking, with scraping-type polyester plaster, containing small and medium particles, fine and no sand holes, easy to scrape, easy to polish, smooth as a mirror	Filling:	Low density, poor filling property: easy to shrink after curing, need to be painted and scratched many times, and the construction period is excessive
Dry:	Quick-drying at room temperature, in the natural state, it can be polished in 3-5 minutes (about 10 minutes in winter). No baking, saving process, improving efficiency and reducing production cost	Dry:	Slow, it needs to be baked and hardened, which increases the process and cost, and the efficiency is low
Shelf life:	Shelf life up to three years Easy to store and use at any time	Shelf life:	The shelf life is short, and it is generally used when facing down, accompanying group cakes, pets, brown moon, night, dark, Babie dust, and being affected by the quality of the knife
Hardness:	High hardness, good flexibility, no cracks, no collapse, not easy to scratch, good bendability, strong impact resistance	Hardness:	Low strength, easy to collapse, no toughness, easy to crack
Multi-function:	Suitable for various substrates, such as paint, steel, cold-rolled sheet, carbon steel sheet, galvanized sheet, aluminum, FGRP, cement, wood, plastic, etc.	Less function:	Most substrates cannot be used. If galvanized sheet cannot be used, there are many classifications, such as rice gold putty, alloy putty, fiber putty, etc.

Instructions:

1. Substrate treatment: Use P80-P120 sandpaper to polish the surface of the substrate to be scraped, remove oil and moisture, and dry it for use.
2. Mix and set aside: mix the main ash with the special curing agent at a ratio of 100: 1-2.5 to make the color uniform.
3. Squeegee coating: Squeeze the mixed putty on the surface of the treated substrate within 5-7 minutes/25°C.
4. Grinding: 60-80 minutes/25°C after scraping, it can be polished for the industrial spraying industry with performance requirements. It has a good repair function for defects such as pits, cracks and welding seams, and meets the conductive topcoat and primer. smooth requirements.

Why choose us?



Professional Research Team



Source factory Non-trader



Teamwork quality is more guaranteed



Sufficient supply and delivery guarantee

Product Certification:

QUALIFICATION CERTIFICATE DISPLAY



Guangzhou Meklon Chemical Technology Co., Ltd.



+8613392100968



Meklonpaint@gzmeklon.com



refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong Province