

## Harmless Car Paint Hardener Clear Coat Multiscene Chemical Resistant

Our Product Introduction

for more products please visit us on [refinishcarpaint.com](http://refinishcarpaint.com)


### Basic Information

- Place of Origin: China
- Brand Name: Meklon
- Certification: ISO,MSDS,SGS
- Model Number: MK-320X
- Minimum Order Quantity: 100Boxes
- Price: 4.64USD-6.92USD
- Packaging Details: Can/Carton;1L\*12,2.5L\*8,4L\*4,4L\*6,5L\*4can
- Delivery Time: 10-15 Working Days
- Payment Terms: T/T
- Supply Ability: 500Boxes/day



### Product Specification

- Features: High Hardness
- Brand: MESHILIANKE
- Color: Transparent
- Material: Resin
- Net Weight: 0.95KG
- Storage Temperature: Room Temperature
- Name: Enviromentally Hardener
- Shelf Life: 1~2 Years At Cool And Dry Place
- Highlight: **cheap automotive primer ,  
automotive color matching,  
Chemical Resistant Clear Coat Hardener**

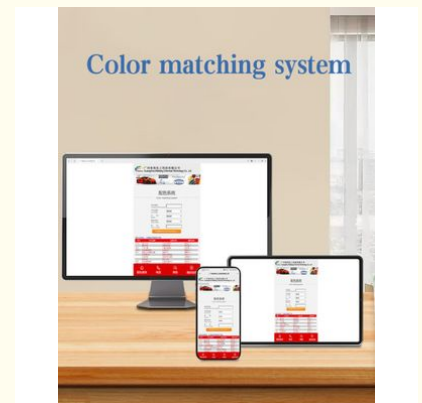

### More Images



## Product Description

### Automotive Paint Car Paint Base Coat Car Body Refinish Thinner Clear Coat Hardener

#### Product Description:

Six brands, including Meishilianke, Feriia, Meishilianke, Meiguanda, and Meklon, are available from the Meklon automobile paint manufacturer. Every brand has distinctive packaging and other characteristics. The research and development group is made up of the company's own R&D engineers, who have created automobile paint products with a spectrum of quality from low to high that adhere to standards.

Features: To accommodate a range of customers, we provide three different high performance varnishes. These three categories are the regular type, the high solid content type, and the economical type. They are all extremely durable, extremely glossy, and resistant to alcohol and gasoline. The 1K base coat may receive the protection, durability, and brightness it needs to be sprayed on from the clear coat. The outcome will be smooth and crystal clear after two wet sprays.

	Temperature	Clear Coat	Hardener	Thinner
Temperature & Match	15	Economic/Standard/High Solid Type Clear Coat	Economic/Standard/High Solid Type <b>Fast Dry</b> Hardener	Fast Dry Thinner
	15-25	Economic/Standard/High Solid Type Clear Coat	Economic/Standard/High Solid Type <b>Standard</b> Hardener	Standard Thinner
	25-35	Economic/Standard/High Solid Type Clear Coat	Economic/Standard/High Solid Type <b>Slow Dry</b> Hardener	Slow Dry Thinner
Mixing Ratio		2	1	0.2-0.5

Spray: Two to three layers of wet spray, separated by flash-off times of five to ten minutes each.

Relevant Period: two hours at 20 °C

Drying Time: Surface drying requires 40 minutes at 20 °C, and total drying requires 12 hours. At 60 °C, fully dry for 40 minutes. Once it has dried overnight, it is suggested to polish the surface.

#### Hardener:

Attributes of excellent anti-yellowing quality. In addition to three models—Fast Dry, Standard, and Slow Dry—we provide three types—Economic, Standard, and High Solid Content (HS). Clear coat, 2K ready-mixed paint, and 2K tinters are all suitable for it.

Please refer to the Clear Coat for the proper ratio to mix.

#### How to Use:

Applying Fast Dry Hardener below 15 °C is suggested.

Use a standard hardener between 15 and 30 degrees Celsius.

Above 30 °C, using the slow dry hardener is recommended.

Original, unopened materials can be stored for more than two years at 20 °C.

[If you're interested, get in touch with us, and we'll give you some samples.](#)



**Guangzhou Meklon Chemical Technology Co., Ltd.**



+8613392100968



Meklonpaint@gzmeklon.com



refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong Province