



Anti Corrosion Car Polyester Putty Rustproof Acid Resistant Gray Color

Our Product Introduction

for more products please visit us on refinishcarpaint.com

Basic Information

- Place of Origin: China
- Brand Name: Meklon
- Certification: ISO,MSDS,SGS
- Model Number: 508+509
- Minimum Order Quantity: 200Boxes
- Price: 4.90USD-5.53USD
- Packaging Details: Carton
- Delivery Time: 10-15 Work Day
- Payment Terms: T/T
- Supply Ability: 500 boxes per day



Product Specification

- Name: Epoxy Primer
- Net Weight: 1.2KG+0.3KG
- Application Method: Brush, Roller, Or Spray
- Color: Gray
- Coverage: 400-600 Square Feet/Gallon
- Dry Time: 1-2 Hours
- Fade Resistance: Yes
- Heat Resistance: Yes
- VOC Content: Low
- Water Resistance: Yes
- Highlight: mixing automotive primer, two tone pearlescent paint, clear coated primer car



More Images



Product Description

Epoxy primer Anti-corrosion anti-rust excellent durability acid and alkali resistance product details:

Productname:	M-508+509 Epoxy primer
Specifications:	1L/4L/5L
Construction methods:	Brush, Roller, Spray
shelf life:	18months
Proportion:	0-25% according to actual situation



Construction requirements:

The two-component paint should be painted and used within 2 hours after adding the curing agent, otherwise the paint will solidify and become unusable. The remaining materials shall not be poured back into the original bucket. The materials planned before construction shall be prepared as needed. Mix the paint strictly according to the proportion and stir thoroughly before applying. Otherwise, the paint film may not be hard enough to dry or separate in color. If the coating interval is too long (more than 15 days), the surface of the previous paint should be roughened and dirt removed before painting to ensure the adhesion between the paint film layers. Before the paint film is fully dry, avoid being exposed to rain or other liquids. Pay attention to ventilation at the construction site. Construction is difficult in rainy, snowy, and foggy weather.

Tool cleaning:


Containers and tools used for construction should be clean and dry, and tools for using water-based paint and oil-based paint must not be mixed.

save spare:

Paint should be placed in a cool, ventilated, dry place and isolated from fire.

Source manufacturer, quality assurance:

Wide range of applications

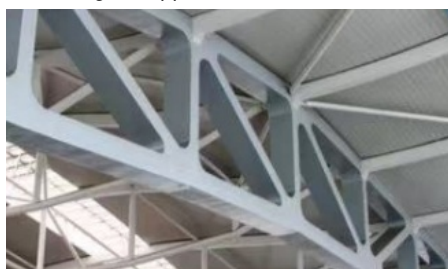

steel




pipeline



bridge



mechanical

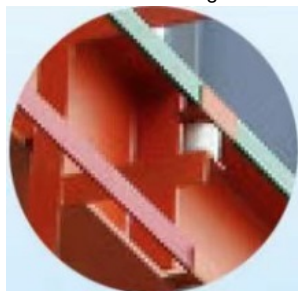

Anti-corrosion and anti-rust:Has excellent durability, acid and alkali resistance, smoke resistance.



Paint film is tough:Can maintain beautiful paint appearance for a long time and maintain low material quality.



Weather resistance:Can maintain beautiful paint appearance for a long time and maintain low material quality.



Good adhesion:Strong adhesion, impact resistance, wear resistance, acid and alkali resistance.



Guangzhou Meklon Chemical Technology Co., Ltd.



+8613392100968



Meklonpaint@gzmeklon.com



refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong Province