


Crystal White 1K Car Paint Basecoat Anti Oxidation Acrylic material And Anti-Corrosion

Our Product Introduction

for more products please visit us on refinishcarpaint.com

Basic Information

- Place of Origin: GUANGDONG CHINA
- Brand Name: MEISHILIANKE series
- Certification: ISO,SGS,MSDS
- Model Number: MK-101
- Minimum Order Quantity: 100 L
- Price: 3.26USD-5USD
- Packaging Details: 0.5L/1L/4L/10L/20L/200L
- Delivery Time: 7-30days
- Payment Terms: T/T
- Supply Ability: 50000L/month

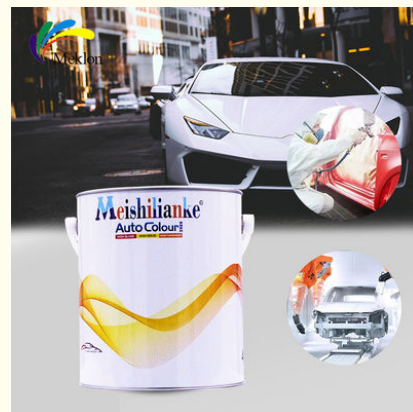

Product Specification

- Main Raw Materials: Acrylic Resin,Polyurethane Resin
- Feature: High Leveling,high Glossy,high Fullness,good Covering,high Adhesion
- Certification: Pigment
- Substrate: 1k Base Coat
- Coating Type: Acrylic
- Mildew Resistant: Yes
- Transport Package: In Standard Export Cartons
- Dry Film Thickness: 1.5-2.0 Mills
- Coating Material: Acrylic
- Color: 1K Scarlet
- Highlight: **Crystal White Car Paint Basecoat, automotive clear coat, Acrylic 1K Basecoat Car Paint**



More Images



Product Description

Chinese Factory 1K Base Auto Spray Acrylic Coat Crystal White Pearl Color Car Paint

Product Introduction

Meklon Coat Basecoat is simple to mix, apply, and provides outstanding coverage and acceptable metal orientation for maximizing OEM solid, metal, and pearl color effects in automotive paint.

Meklon Coat basecoat offers the best color fidelity.

For longevity, a Meklon Coat basecoat must be used in conjunction with a Meklon Coat clearcoat.

Old or original paintwork should be thoroughly sanded and cleaned.

Primer surface or surface, unshanded in a wet on wet method Primer surface or surface, sanded and cleaned

Before use, surfaces need to be well cleaned and prepped.

Areas that need repair should be cleaned and sanded using P500-P600 (by machine) or P800-P1000 (by hand).

Features of the product include a hard paint film, good leveling properties, ease of construction, strong adhesion, outstanding external weather resistance, a lengthy anti-oxidation time, the ability to be blended with a range of simple colors, metal effects, and pear effects, and excellent layer adhesion.

Specification

Product name	1K BASE COAT 1K Scarlet
Mixing ratio	1: 1-1.2 100 parts 1K Base coat 100-120 parts Thinner
Spray coats	Spray 2-3 layers, the flash-off time is 5 to 8 mins.
Dry Time	15 min(20°C)
Shelf Life	2 years in original sealer in cool and dry place at 20°C
Packaging (per carton)	1L*12can, 4L*4can
Product advantages	Extra fast drying and high quality finishing. Good color covering power and leveling. Varied color cover full range with high color saturation.
Instructions	Spray
Brand Name	Meklon

Application method

Spray gun	Gravity gun	Suction gun
	Gun nozzle: 1.2mm, Gun pressure: 2.0-3.0 MPa	Gun nozzle: 1.5mm, Gun pressure: 2.0-3.0 Mpa
Substrate	Dry 1K primer surface with smooth effect	
Paint preparation	1K Mud Yellowpaint-thinner-EX10/EX20/EX30	
Mix ratio	1 : 1 (base paint : thinner)	
Spraying layers	2-3 coats	
Flash off time	3-5 mins , 20-25	
Surface dry time	15-20mins	
Time to Polish	1h, P1000 sanded paper	
Relationship between drying temperature and time of 1K base coat		
Tenmperture	Surface Drying time	Time to Polish
25	10-15 mins	1 hour
35	5-10 mins	40 mins
60	3-5 mins	15 mins

Meklon Coat Basecoat is a highly versatile automotive paint basecoat engineered for effortless mixing and application. It exceptional coverage guarantees flawless results and optimal color match, making it ideal for replicating OEM solid, metallic, and pearl color effects.

For enhanced durability and longevity, it is recommended to combine Meklon Coat Basecoat with Meklon Coat clearcoat. This powerful duo forms a robust and long last protective layer that can stand with various environmental conditions.

It's crucial to prepare the metallic surface before applying the basecoat. A smooth and homogeneous canvas is produced by thoroughly sanding and cleaning the current or original paints. In a wet on wet procedure, applying prime surface or surface that has been sanded, cleaned, or left unhandled enhances good adherence and a faultless finished look.

To obtain the desired smoothness when addressing repair areas, accurate sanding with P800-P1000 grit (by hand) or P500-P600 grit (by machine) is necessary. It is essential to thoroughly clean the repaired areas to get rid of any impurities or debris that can affect the outcome.

Meklon-Coat Basecoat has a number of outstanding characteristics that improve its performance. It creates a solid paint coat with great leveling abilities that makes application simple. The basecoat's high resistance to outside elements offers long-lasting protection, and its superior adhesion ensures a solid contact with the surface. Durability and endurance are further improved by its prolonged anti-oxidation duration.

Meklon-Coat Basecoat provides a plethora of simple colors, metallic effects, and pearl effects compatibility, providing many creative customization options. A completely smooth and expert finish is guaranteed by its outstanding inter-layer adhesion.

In conclusion, Meklon-Coat Basecoat is a flexible basecoat for automobile paint that offers unsurpassed coverage and accurate color matching. It provides increased durability when used in conjunction with Meklon-Coat clearcoat. This basecoat provides great qualities by adhering to thorough surface preparation, including a robust paint layer, simple application, high adhesion, exceptional weather resistance, and compatibility with diverse color effects. For an effective and long-lasting vehicle paint solution, use Meklon-Coat Basecoat.





Guangzhou Meklon Chemical Technology Co., Ltd.



+8613392100968



Meklonpaint@gzmeklon.com



refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong Province