



IS09001 Automotive Base Coat Paint medium yellow Touch Up Rust Oleum Strong Adhesion

Our Product Introduction

for more products please visit us on refinishcarpaint.com

Basic Information

- Place of Origin: GUANGDONG CHINA
- Brand Name: Meklon
- Certification: ISO,SGS,MSDS
- Model Number: 120
- Minimum Order Quantity: 200L
- Price: USD3.06/L-10.5/L
- Packaging Details: 1L*12,4*4,20L,200L
- Delivery Time: 5-8 work days
- Payment Terms: T/T
- Supply Ability: 500000L/month



Product Specification

- Material: Acrylic Resin
- Usage: Car Paint, Plastic Coating
- Application Method: Spray
- State: Liquid Coating
- Brand: Carcharm
- Shelf Life: 3 Years
- Port: Hong Kong, Huangpu, Shekou, Nansha
- HS Code: 320890
- High Light: Honda Ready Mixed Car Paint
- Coverage: Various Coverage
- Highlight: Automotive Base Coat Paint



More Images



Product Description

IS09001 Automotive Base Coat Paintmedium yellow Touch Up Rust Oleum Strong Adhesion

Automotive Paint Basecoat:

Elevate your automotive finish with Meklon-COAT basecoat, a cutting-edge product color system boasting over 60 base colors, including 16 Pearlescent, iridescent, and tinted metallic toners, as well as 6 xirallc options. This high-pigmented system not only ensures economic use but also delivers greater coverage, saving both time and resources. With only 2 coats required and minimal waiting time for the top coat application, experience efficiency like never before.

Surface Preparation:

Ensure optimal results by thoroughly sanding old paint surfaces and appropriately priming and preparing surfaces.

Suitable Substrates:

Meklon-COAT General 1K or 2K primers

- OEM Primer, sanded

Meklon-COAT General Polyester Putties

- Bare metal substrates must be pre-primed with wash primer YX-95

Product Features:

Our Meklon paint basecoat promises a hard paint film, exceptional leveling performance, easy construction, and strong adhesion. With excellent outdoor weather resistance and a prolonged anti-oxidation time, this one-component base paint can be seamlessly mixed with a variety of plain colors, metal effects, and pearl effects. Experience superb adhesion between layers, ensuring a lasting and visually appealing finish for your automotive projects. Choose Meklon for automotive paint excellence.



Application method

spray gun	Gravity gun	Suction gun
	gun nozzle: 1.2mm, gun pressure: 2.0-3.0 MPa	gun nozzle: 1.5mm, gun pressure: 2.0-3.0 Mpa
substrate	dry 1K primer surface with smooth effect	
Paint preparation	1k paint- thinner-EX10/EX20/EX30	
mix ratio	1 : 1 (base paint : thinner)	
spraying layers	2-3 coats	
flash off time	3-5 mins , 20-25	
surface dry time	15-20mins	
Time to Polish	1h, P1000 sanded paper	
Relationship between drying temperature and time of 1K base coat		
Tenmperture	Surface Drying time	Time to Polish
25	10-15 mins	1 hour

35	5-10 mins	40 mins
60	3-5 mins	15 mins

Safety instructions :

- The use of appropriate personal protective equipment is recommended during application to prevent the irritation of the respiratory tract, skin and eyes. For professional use only.
- After 15 minutes at 20 °C, the base may be masked and sprayed with another varnish or clear coat.

Storage :

Keep in a tightly covered container and in a dry and ventilated environment, avoiding exposure to sun directly. Temperature above 10 °C is recommended, between 15 and 30 °C optimal.




Safety Guidelines:

For exclusive use by professionals. KEEP OUT OF REACH OF CHILDREN. WARNING! FLAMMABLE CONTENTS. VAPOR AND SPRAY MIST MAY BE HARMFUL. SKIN AND EYE IRRITATION POSSIBLE. Handle Prospray products only after thoroughly reading and understanding the Material Safety Data Sheets. Ensure comprehensive training for all employees on Material Safety Data Sheets and chemicals encountered during automotive paint applications. Utilize protective clothing, gloves, and eye safety with side shields. This safety information is provided in good faith but without warranty. The details herein reflect the current state of our knowledge and serve as guidance for our automotive paint products and their applications. It is not intended to guarantee specific product properties or their applications. Adhere to all warnings specified on product labels.

Storage Guidelines:

Store in a tightly sealed container within a dry and well-ventilated environment, avoiding direct sunlight exposure. Maintaining temperatures above 10 °C is recommended, with an optimal range between 15 and 30 °C.

Note: Always follow safety protocols when handling automotive paint products, and ensure compliance with recommended storage conditions for optimal performance.

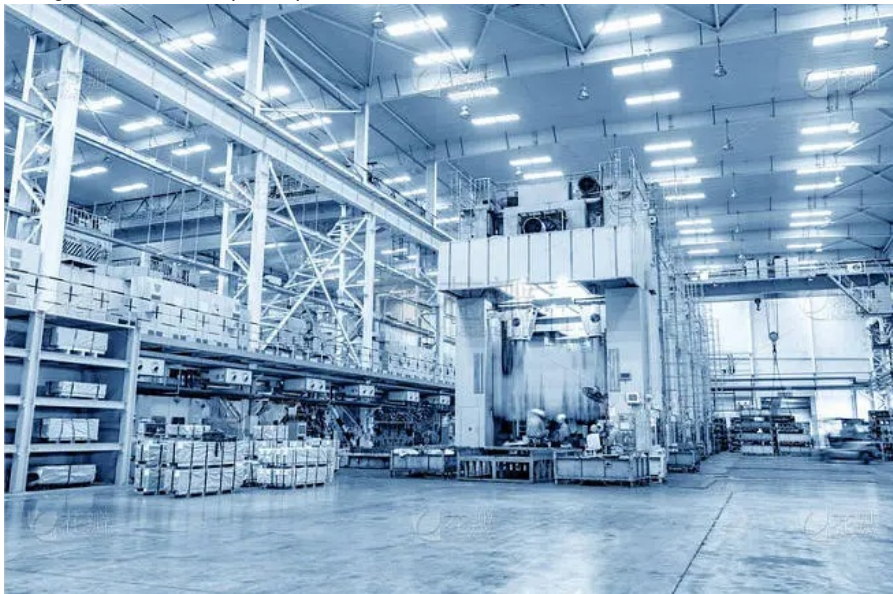



Guangzhou Meklon Chemical Technology Co., Ltd.



+8613392100968



Meklonpaint@gzmeklon.com



refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong
Province