



Strong Adhesion Refinish Car Paint High Solid Auto Paint

Our Product Introduction

for more products please visit us on refinishcarpaint.com

Basic Information

- Place of Origin: GUANGDONG CHINA
- Brand Name: Meklon
- Certification: ISO,SGS,MSDS
- Model Number: 122
- Minimum Order Quantity: 200L
- Price: USD3.06/L-10.5/L
- Packaging Details: 1L*12,4*4,20L,200L
- Delivery Time: 5-8 work days
- Payment Terms: T/T
- Supply Ability: 500000L/month



Product Specification

- Material: Acrylic Resin
- Usage: Car Paint, Plastic Coating
- Application Method: Spray
- State: Liquid Coating
- Brand: Carcharm
- Shelf Life: 3 Years
- Port: Hong Kong, Huangpu, Shekou, Nansha
- HS Code: 320890
- High Light: Honda Ready Mixed Car Paint
- Coverage: Various Coverage
- Highlight: one stage auto paint, auto body paint matching



More Images



Product Description

Car Paint Refinish Automotive Coating Supplier High Solid Auto Paint

Automotive Paint Basecoat:

Experience unparalleled performance with Meklon Paint Basecoat, delivering exceptional hiding capabilities combined with effortless application. Whether working on import or domestic vehicles, Meklon paint ensures the superior results you anticipate from a premium refinishing system.

Surface Preparation:

Ensure proper surface preparation by employing the recommended undercoat system and adhering to suggested procedures. Finish all surfaces with P400 - P500 dry sandpaper or equivalent, whether using wet or dry methods.

Suitable Substrates:

Meklon paint PRIMER-SURFACER

Meklon paint PLASTIC PRIMER

OEM finishes

Aged refinishes

Product Features:

Our Meklon paint Basecoat boasts a range of features:

Forms a durable paint film

Exhibits excellent leveling performance

Facilitates easy application

Ensures strong adhesion

Displays outstanding outdoor weather resistance

Offers extended anti-oxidation time

Compatible with various plain colors, metal effects, and pearl effects

Establishes excellent adhesion between layers.

Upgrade your refinishing experience with Meklon paint Basecoat, the one-component base paint that sets a new standard in automotive paint quality.



Application method

| spray gun | Gravity gun | Suction gun |
|-------------------|---|---|
| | gun nozzle: 1.2mm, gun pressure: 2.0-3.0 MPa | gun nozzle: 1.5mm, gun pressure: 2.0-3.0 Mpa |
| substrate | dry 1K primer surface with smooth effect | |
| Paint preparation | 1k paint- thinner-EX10/EX20/EX30 | |
| mix ratio | 1 : 1 (base paint : thinner) | |
| spraying layers | 2-3 coats | |
| flash off time | 3-5 mins , 20-25 | |

| | | |
|--|------------------------|----------------|
| surface dry time | 15-20mins | |
| Time to Polish | 1h, P1000 sanded paper | |
| Relationship between drying temperature and time of 1K base coat | | |
| Tenmperture | Surface Drying time | Time to Polish |
| 25 | 10-15 mins | 1 hour |
| 35 | 5-10 mins | 40 mins |
| 60 | 3-5 mins | 15 mins |

Safety Guidelines for Automotive Paint Products:

Strictly for professional use. Keep out of reach of children. Caution! Contents are flammable. Vapor and spray mist may be harmful and can cause skin and eye irritation. Before handling Prospray automotive paint products, carefully read and comprehend the Material Safety Data Sheets (MSDS). Ensure that all employees receive adequate training on Material Safety Data Sheets and are familiar with the chemicals involved, including automotive paint. When handling and applying automotive paint products, wear protective clothing, gloves, and eye safety with a side shield. This data sheet is provided in good faith but without warranty. The information herein reflects our current knowledge and serves as a guide for Prospray automotive paint products, outlining their uses; it does not guarantee specific product properties or their applications. Adhere to all warnings on Prospray automotive paint product labels.

Storage Recommendations:

Store Prospray automotive paint products in a tightly sealed container within a dry and well-ventilated environment, steering clear of direct sunlight exposure. It is advisable to maintain temperatures above 10 , with an optimal range between 15 and 30 .

Important: Always follow safety protocols during the handling of automotive paint products and ensure compliance with recommended storage conditions for optimal performance in automotive refinishing projects.





FAQ:

Q1: Are you trading company or manufacturer ?

A: Yes, we are. Our factory is in Shaoguan, Guangdong, China. It takes one and half hour by car from Guangzhou airport to our factory.

Q2: Do you provide samples ? is it free or extra ?

A: According to the actual situation, we can provide free samples.

Q3: Can you manufacture the paint under my brand and my logo?

A: We could help to pack and deliver under your brand, but we would require some license from you and we have requirement for the order quantity..

For details, please contact us to get our OEM Cooperation Terms.

Q4: Is your car paint suitable for our weather?

A: This has been tested by our national wide customers and overseas markets. What's more, we can adjust the formula as per the climate condition of each local market.


Q5: Can you do customized colors?

A: Yes, we can, but we need the color sample from buyers. Or maybe you can send a picture for us for reference.

Q6: What free advertising materials would you give us if I send you an order? And how many pieces would you give free?

A: We could arrange free advertising materials such as mixing machine, balance/scale, spray gun, display racks, T-shirt, cap, CDs, posters, tinting maps, TDS, color reference cards, mixing rulers...etc.

While the quantity we could offer free is based on your order amounts.

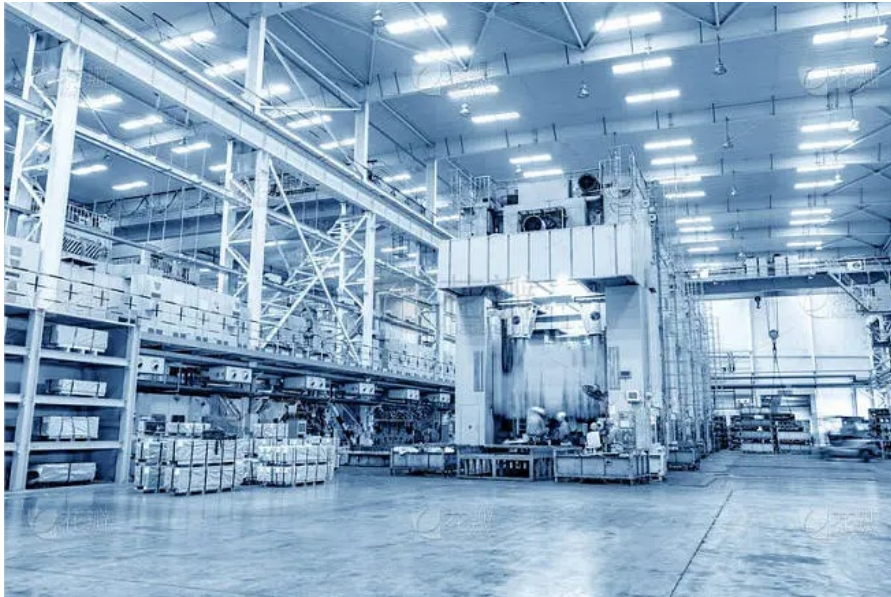

Guangzhou Meklon Chemical Technology Co., Ltd.



+8613392100968



Meklonpaint@gzmeklon.com



refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong Province