




## Through Green Refinish Car Paint for High Temperature Environments

### Our Product Introduction

for more products please visit us on [refinishcarpaint.com](http://refinishcarpaint.com)

#### Basic Information

- Place of Origin: China
- Brand Name: PORSHICHE
- Certification: ISO,MSDS,SGS
- Model Number: P-210
- Minimum Order Quantity: 200L
- Price: 2.73USD/L-5.56USD/L
- Packaging Details: Box/Carton
- Delivery Time: 10-15 Work Day
- Payment Terms: T/T
- Supply Ability: 500 L per day

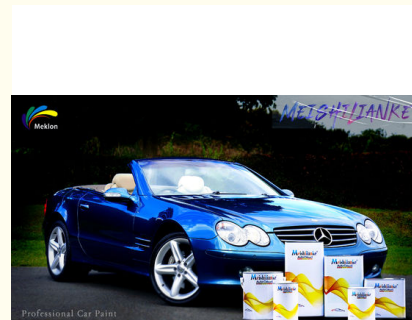

#### Product Specification

- Brand: PORSHICHE
- Color: Purple Blue
- Product Name: P-209 Purple Blue
- Suitable Surfaces: Metal, Plastic, Fiberglass
- Indoor/outdoor: Indoor/Outdoor
- Code: P-210
- Recoat: 2 Hours
- Scrub Resistance: Yes
- Form: Liquid
- Scratch Resistance: Highly Resistant To Scratches
- Product Type: Automotive Paint
- Application: Spray
- Odor: Low
- Voc: Low
- Fade Resistant: Yes



#### More Images



## Product Description

### Through Green Refinish Car Paint for High Temperature Environments

#### Product Description

Product Name:	P-210 through green	Specifications:	1L/4L/5L
Features:	high covering power, high temperature resistance	Scope of application:	Cars, ships, vehicle, tanks
Color:	through green	Voc:	Low
Storage method:	Store in a cool, dry, ventilated and dark place	Sales scope:	global
Drying time:	surface drying time is 2 hours, actual drying time is 24 hours	Mixing ratio:	paint:curing agent:thinner=2:1:0.3
Substrate treatment:	Before spraying the substrate, the substrate must be cleaned, degreased with degreaser, and polished with 800#~1000# sandpaper. Clean it after polishing, and use degreaser to remove oil again.		
Processes:	The spraying process uses wet spraying to spray 2 to 3 layers on the surface of the substrate. Pay attention to leaving 5 to 10 minutes of evaporation time between each two layers. After spraying, the paint film needs to stand for 10 to 15 minutes. Then bake. Thickness in dry film state: 35~50 microns		

P-210 Through Green car paint is an eco-friendly automotive coating, distinguished by its fine pigments and vibrant hues. It offers versatility in application, allowing for standalone use or creative blending with other colors.

The mixing ratio for this green paint is customizable to suit individual preferences and the specific paint being used. Typically, the ratio is determined by the base color and the modifiers, with our color mixing app providing a reference for achieving the desired finished hue.

The standard ratio for application is varnish:hardener:thinner at 2:1:0.3-0.5. The hardener serves to accelerate the drying and curing process, ensuring a robust and durable paint surface that offers enduring protection.

#### Application Method:

1. Preparation: Ensure the vehicle surface is meticulously cleaned and smoothed, with any necessary repairs and polishing completed beforehand.
2. Primer Application: Apply a primer layer to the vehicle's surface to ensure optimal adhesion and a smooth foundation for the paint.
3. Through Green Paint Coating: Utilize professional-grade spray equipment and techniques to evenly distribute the paint across the vehicle's surface. Maintain the correct spray distance and angle to prevent issues such as dripping or uneven coverage.
4. Drying and Curing: Allow ample time for the paint to dry and cure fully, strictly adhering to the instructions provided.

#### Post-Application Maintenance:

- Protect the vehicle from extreme temperatures and weather by parking in shaded areas or using a garage when possible.
- Regularly clean the vehicle to remove debris, using appropriate cleaning products and soft sponges to avoid scratching the paint.
- Apply a high-quality wax to the P-210 Through Green paint to enhance protection and gloss, following the wax manufacturer's instructions.
- Exercise caution to prevent scratches and dents, as these can mar the paint and increase repair expenses.

#### Storage Conditions:

- To preserve the integrity and performance of the green car paint, store unused portions in a cool, dry, and well-ventilated environment, away from direct sunlight and temperature extremes.
  - Ensure containers are tightly sealed to prevent contamination from air and moisture.
  - Be mindful of the product's shelf life, typically 1-3 years, and use within the recommended period for best results.
- This optimized guide emphasizes precision in application and care, ensuring that the P-210 Through Green paint maintains its exceptional quality and appearance over time.

#### Our advantage

Our commitment to excellence in automotive paint production is rooted in a meticulous approach to quality management. We harness the power of high-grade raw materials and cutting-edge production technologies to deliver products of unparalleled quality. Our stringent quality control protocols and inspection benchmarks are designed to meet and often surpass international standards, ensuring that our products consistently meet the rigorous demands of our customers.

At the heart of our innovation is a collaboration with a seasoned team of professionals, including experts from PPG. Their dedication to the relentless pursuit of excellence drives the continuous refinement of our paint formulations and production methodologies. By staying at the vanguard of industry trends and technological advancements, we ensure that our products are not only current but also anticipate and adapt to the dynamic needs of our customers.

Our production capabilities are underpinned by state-of-the-art equipment and flexible production lines that enable us to maintain high throughput and agility. We are adept at swiftly accommodating large-scale production demands while also expertly managing bespoke small-batch production to cater to the unique and personalized preferences of our clientele. Sustainability and environmental stewardship are core to our operations. We prioritize the use of eco-friendly materials and processes, thereby minimizing our ecological impact. Adherence to environmental regulations and standards is paramount, and we are proactive in reducing waste and energy consumption to shrink our carbon footprint.

We place immense value on our partnerships with customers, fostering an environment of open communication and active engagement. Our comprehensive support infrastructure encompasses pre-sales and post-sales services, including technical consultations, product training, and problem-solving solutions. We are dedicated to forging long-term, collaborative relationships built on mutual success and a shared vision for sustainable development.

#### Factory photos:



**Guangzhou Meklon Chemical Technology Co., Ltd.**



+8613392100968



Meklonpaint@gzmeklon.com



refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong Province