



## Stable Performance Refinish Car Paint Putty For Automotive Repair

Our Product Introduction

for more products please visit us on [refinishcarpaint.com](http://refinishcarpaint.com)

### Basic Information

- Place of Origin: China
- Brand Name: Meklon
- Certification: ISO,MSDS,SGS
- Model Number: 512
- Minimum Order Quantity: 200L
- Price: 2.73USD/L-5.56USD/L
- Packaging Details: Box/Carton
- Delivery Time: 10-15 Work Day
- Payment Terms: T/T
- Supply Ability: 500L per day




### Product Specification

- Name: Putty
- Durability: Long-lasting And Reusable
- Main Raw Materials: Resine, Solvent, Pigment, LPG
- Product Usage: Exterior Car Cleaning
- Special Features: Scratch-free And Streak-free Formula
- Application Area: Chemical
- Mixer Type: Static Mixers
- Storage: Cool And Dry Place
- Specification: 1LX12
- Net Weigh: 0.95KG
- Highlight: Automotive Repair Car Paint Putty, Stable Performance Car Paint Putty



### More Images




## Product Description

### Stable Performance Refinish Car Paint Putty For Automotive Repair

#### Manufacturer Introduction:

Meklon Automotive paint manufacturing factory with 20 years of rich experience. Our automotive paint manufacturing factory covers an area of 3,000 square meters and is a modern production base that combines innovation, efficiency and quality. Meklon has research department, testing, production department, sales department, after-sales department, etc. Our products include 1K, 2K primer, topcoat. Thinner, hardener, varnish, clear coat, putty, etc. A full range of products. The top five putty manufacturers in China, with large output, good quality and affordable price.

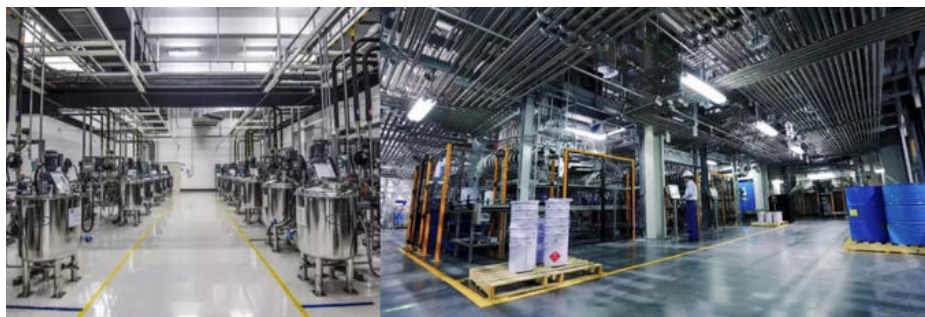

#### product description:

As a professional car paint dealer, we are proud to introduce you to our high-quality car paint putty.

##### Excellent performance:

Our putty has excellent filling ability and can easily fill dents, scratches and small potholes on the surface of the car body, laying a solid foundation for subsequent painting work. Its good adhesion ensures that the putty is tightly combined with the car body and is not easy to fall off.

##### Reliable quality:

Using high-quality raw materials and advanced production processes, strict quality control processes ensure that each batch of putty meets high standards. After multiple tests and actual application verification, our putty can maintain stable performance for a long time.

##### Strong weather resistance:

Whether in hot summer or cold winter, whether in humid environment or dry climate, our putty can withstand the test. It will not crack or deform due to temperature changes and humidity differences, providing lasting protection for your car.

##### Easy to use:

First, make sure the surface to be repaired is clean, dry and free of oil and rust.

After filling with 350R atomic putty, use a scraper to evenly apply 512 putty to the area to be filled, slightly higher than the surrounding surface.

Wait for the putty to dry, the drying time will vary depending on the ambient temperature and humidity.

Once dry, use sandpaper to smooth the putty and make it flush with the surrounding surface.

##### The effect is remarkable:

The surface of the car repaired with our putty is flat and smooth, providing an ideal foundation for painting. After painting, the traces of the repair are almost invisible, making your car restored to its original and bright appearance.

Choosing our car paint putty is choosing professionalism, quality, and making your car shine with a new charm. Whether you are a car repair professional or a car owner, our putty will be your ideal choice.



#### Operation process:

##### 1. Surface preparation

Clean the car surface thoroughly to remove dirt, grease, rust and old paint.  
Use sandpaper to polish the surface to increase the adhesion of the new paint.  
Protect the areas that do not need to be painted with masking materials.

##### 2. Mixing paint

According to the proportions specified in the paint product instructions, mix the paint, hardener and thinner accurately.  
Stir well to ensure that the paint components are fully integrated.

##### 3. Spray gun settings

Choose a spray gun suitable for car paint. Gravity spray guns are usually recommended.  
Adjust the air pressure, paint output and spray shape of the spray gun.

##### 4. Spraying skills

Keep the spray gun perpendicular to the car surface at a distance of about 15-20 cm.  
Use a zigzag or overlapping spraying method. Each spray should cover 50%-60% of the previous one.  
Start spraying from more hidden areas, such as the inside of the door and the inside of the hood.  
Gradually expand outward and finally spray the conspicuous areas.

##### 5. Multi-layer spraying

Multi-layer spraying is usually required, and appropriate drying time should be allowed between each layer.  
The first layer is sprayed thinly, called "mist spraying", to increase adhesion.  
Subsequent layers are gradually thickened until the desired color and gloss are achieved.

##### 6. Drying and curing

Allow the sprayed car paint to dry naturally in a well-ventilated environment.  
Depending on the type of paint and ambient temperature, the drying time may vary.  
Some paints may require heat curing to enhance performance.

##### 7. Inspection and finishing

After the paint is dry, check the surface for defects such as sagging, orange peel, particles, etc.  
If necessary, lightly sand with sandpaper and re-spray finishing.



#### Customer feedback:

"I run an auto repair shop and have been looking for a high-quality and stable auto paint. Since using your product, it has really solved my big problem! Your auto paint has accurate color and strong covering power. Whether it is a small area repair or a full



car spray, the effect is perfect. And it has excellent weather resistance. After customers use it for a long time, the paint surface is still bright and beautiful. Thank you very much for providing such an excellent product!"

"As a car modification enthusiast, the requirements for paint are quite high. After trying your car paint, I am so satisfied! The color is rich and unique, especially the metallic paint, which instantly upgraded my car to a higher level. During the construction process, the paint has good leveling and dries quickly, which greatly shortens the modification time. I highly recommend it to other friends who modify their cars!"

"We are a large car beauty chain store. After cooperating with you, customer satisfaction has been greatly improved. Your car paint is of high quality. Not only is the color full and lasting, but it is also hard and wear-resistant, and can withstand various daily wear and tear. At the same time, your after-sales service is also very thoughtful, so we have no worries during use. We will continue to cooperate with you!"

Many customers have given high praise and evaluation after using the Toyota 1C0 Light Champagne car paint produced by our factory.

They said that this paint not only has beautiful color and outstanding effect, but also has a smooth construction process and moderate drying time. After the vehicle is repainted, the appearance is brand new and can remain in good condition for a long time.

One customer said: "Since my Toyota car has used your 1C0 Light Champagne car paint, it can attract a lot of attention every time I drive out. I am really satisfied!"

Another customer also praised: "The quality of this paint exceeded my expectations. Not only is the color positive, but it is also very durable. It has experienced several heavy rains and sun exposures and is still radiant."

In short, the Toyota 1C0 Light Champagne car paint produced by the Meklon factory has become a high-quality choice in the field of car paint with its excellent color quality, excellent effect, excellent leveling and good customer feedback. Whether you are a car repair shop or an individual car owner, you can get a satisfactory painting experience from it.





**Guangzhou Meklon Chemical Technology Co., Ltd.**



+8613392100968



Meklonpaint@gzmeklon.com



refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong  
Province