



Easy To Sand Strong Adhesion High Temperature Resistance Automotive Putty Body Filler

Basic Information

Place of Origin: ChinaBrand Name: Meklon

Certification: ISO,MSDS,SGS

Model Number: P-522
Minimum Order Quantity: 1000Boxes
Price: USD2-2.5/Piece
Packaging Details: Can/Carton
Delivery Time: 10-15 Work Day

Payment Terms: T/T

• Supply Ability: 500 boxes per day



Product Specification

Specification: 0.95Lx12Application Area: Chemical

Product Usage: Exterior Car Cleaning

Compatibility: Suitable For All Types Of Cars

Special Features: Scratch-free And Streak-free Formula

Manufacture Location: ChinScratch Resistant: Yes

Fields Of Use: Car Repair/car Detailing

Package: Can/cartonProductname: Vehicle Car Paint

• Fade Resistance: Yes



More Images



Product Description

Easy To Sand Strong Adhesion High Temperature Resistance Automotive Putty Body Filler

Meklon company introduction

Meklon is a professional solution provider in the global automotive repair and coating field, with over 20 years of experience in the industry. With "professionalism, quality, and reliability" as its core, Meklon provides one-stop services from automotive paint to a full range of auxiliary materials for global partners.

The company is headquartered in China and its own modern factory is one of its core competitiveness - the factory is equipped with advanced production equipment and automated production lines, strictly follows ISO quality management system and environmental standards, and ensures that every batch of products undergoes layers of quality inspection from raw material screening to finished product delivery. Relying on China's well-established supply chain system and manufacturing experience, Meklon factory not only achieves efficient and stable production capacity output (supporting rapid delivery of large orders), but also creates a full chain product matrix covering automotive paint (solid/metal/pearl paint and other full effect types), high-temperature masking film, precision color matching system, professional spray gun, etc. through continuous technology research and development investment. The automotive paint color database includes more than 150000 sets of formulas (including over 8000 mainstream car original color codes worldwide), and auxiliary material products have passed international certifications such as SGS, combining durability and functionality.


From raw materials to finished products, from research and development to after-sales service, Meklon takes Chinese intelligent manufacturing as the cornerstone, deeply integrates professional processes with global needs, and is committed to becoming the most trusted coating partner for customers.



Product Description

Produ ct Numb er	P-522
Featur e	Easy to scratch, quick drying at room temperature, easy to sand, strong adhesion, high temperature resistance, strong filling ability, no cracking, no shrinkage, good compatibility and other advantages.
Applic ation	Various metal surfaces, various primers and old paint surfaces, etc.
Shelf life	12 months in its original sealed container at 20 in a cool and dry place.
Applic ation metho d	Mix the main putty and hardener in proportion and complete it within the gel time. Scratched and polished putty Two component primer or treated substrate surface. If a thick coating is required, it is best to scrape it several times. If bubbles appear during the coating process, they must be thoroughly scraped with a scraper.



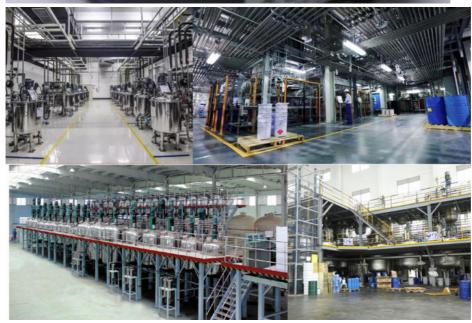



Guangzhou Meklon Chemical Technology Co., Ltd.



Meklonpaint@gzmeklon.com



refinishcarpaint.com