



1064 Fast-Drying Automotive 2K Clear Coat Hardener High Gloss for Car Paint Refinishing

Our Product Introduction

for more products please visit us on refinishcarpaint.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Meklon
- Certification: ISO 9001:2015
- Model Number: ML-1064
- Minimum Order Quantity: 100 Liters
- Price: USD 3-6 / Liter
- Packaging Details: 1L / 4L metal tins, 4 tins per carton, export-grade corrugated carton
- Delivery Time: 3-5 days for stock, 15-20 days for production
- Payment Terms: T/T
- Supply Ability: 200000 Liters per Month




Product Specification


- Product Type: Fast-Drying 2K Clear Coat Hardener
- Mixing Ratio: 2:1 (Clear Coat : Hardener)
- Drying Time: Dust-free 15-20 Min, Full Cure 24 Hours
- Pot Life: 2-4 Hours At 20 C
- Application Temperature: 15-30 C
- Shelf Life: 24 Months
- Packaging: 1L / 4L Tins
- Highlight: Fast-Drying Automotive Paint Hardener, 2K Clear Coat Curing Agent, High Gloss Car Refinish Coating



More Images



High resistance to weathering



Car Paint
OEM & ODI
Factory Wholesale



Product Description

1064 Fast-Drying Hardener for 2K Automotive Clear Coat

Quick Cure · High Gloss · Weather Resistant

Product Features

Fast-Drying Curing — Dust-free in 15-20 minutes, dry to handle in 2-3 hours, full cure in 24 hours, maximizing workshop turnaround.

High-Gloss Finish — Produces a deep, mirror-like gloss with excellent leveling and a smooth, even surface.

Strong Adhesion & Scratch Resistance — Excellent interlayer adhesion and hardness for a durable, long-lasting coating.

Our Product

Weather & Chemical Resistance — Strong UV, chemical and alkali resistance, ideal for tropical and high-temperature markets.

Product Overview



Product Description

The Meklon 1064 fast-drying hardener is a high-performance 2K curing agent for automotive clear coat systems. It accelerates the curing process, achieving dust-free drying in 15-20 minutes and full cure within 24 hours, which significantly shortens workshop turnaround and boosts productivity for body shops and distributors. Factory direct from an ISO 9001 & ISO 14001 certified manufacturer.

Usage & Application




Mixing Ratio: 2:1 (clear coat : hardener), add 0.3-0.5 part thinner as needed. Stir thoroughly before use.

Pot Life: 2-4 hours at 20°C after mixing.

High resistance to weathering

Not affected by sandstorms, rain, snow or direct sunlight

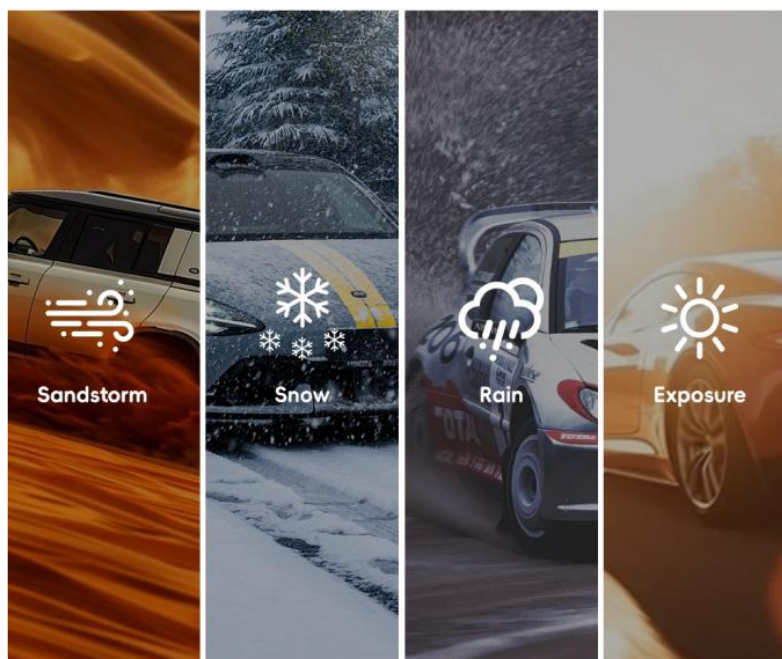

Application: Spray 2-3 coats with 10-15 minutes flash-off between coats; each coat 40-60 microns.

Temperature: Apply at 15-30°C.



Drying: Dust-free in 15-20 minutes, dry to handle in 2-3 hours, full cure in 24 hours.

Storage: Sealed and dry, 15-20°C; shelf life 24 months.

Frequently Asked Questions

Q: What is the mixing ratio for the 1064 fast-drying hardener?

A: The recommended mixing ratio is 2:1 (clear coat : hardener), with 0.3-0.5 part thinner added according to ambient temperature. Stir thoroughly before use to ensure uniform curing.

Q: How fast does the 1064 hardener cure?

A: It dries dust-free in 15-20 minutes, is dry to handle in 2-3 hours, and reaches full cure in 24 hours. The fast-drying formula dramatically shortens workshop turnaround and improves productivity.

Q: What is the pot life and shelf life of this hardener?

A: The pot life after mixing is 2-4 hours at 20°C. When stored sealed in dry conditions at 15-20°C, the shelf life is 24 months from the production

date.

Q: Can the drying speed be customized for different climates?

A: Yes, we can adjust the drying speed, VOC level and climate adaptation to suit your regional conditions. Custom formulation, OEM branding and private labeling are available for distributors.

Meklon Premium Automotive Refinish Paint Manufacturer
ISO 9001 & ISO 14001 Certified



Guangzhou Meklon Chemical Technology Co., Ltd.



+8613392100968



Meklonpaint@gzmeklon.com



refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong Province