



High Density Extra White Automotive Refinish Paint For Matching Original Paint

Our Product Introduction

for more products please visit us on refinishcarpaint.com


Basic Information

- Place of Origin: China
- Brand Name: Meklon
- Certification: ISO,MSDS,SGS
- Model Number: F-201
- Minimum Order Quantity: 200L
- Price: 2.73/LUSD-5.56/LUSD
- Packaging Details: Carton
- Delivery Time: 10-15 Work Day
- Payment Terms: T/T
- Supply Ability: 200Lper day



Product Specification

- Brand: Meklon
- Name: High Density Extra White
- Specification: 1Lx12
- Package: Can And Carton
- Net Weight: 1.2KG
- Application: Brush, Roller, Or Spray
- Coverage: High
- Durability: Long-lasting
- Fade Resistant: Yes
- Heat Resistance: Yes
- State: Liquid Coating
- Type: Automotive Paint
- Voc: Low
- Highlight: **High Density Automotive Refinish Paint, Matching Original Paint Automotive Refinish Paint**

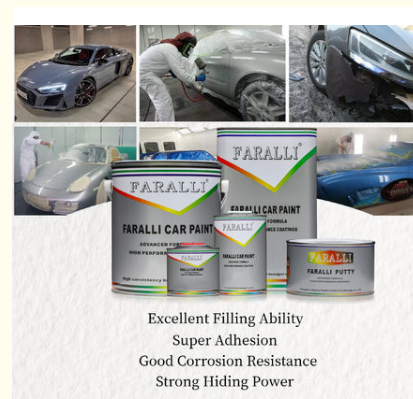

More Images



Product Description

High Density Extra White Automotive Refinish Paint for Matching Original Paint

Introducing 2K High Density Extreme White Automotive Refinish Paint – a premium solution for automotive paint restoration, renowned for its exceptional purity and brilliance. This paint is meticulously formulated to deliver an unparalleled visual impact, ensuring that the refinished surface of your vehicle exudes a pristine, luminous white that stands out on the road.

Key Features:

Purity and Brightness: The 2K High Density Extreme White boasts a remarkably pure and vivid hue, enhancing the aesthetic appeal of your vehicle with a striking, eye-catching finish.

Superior Coverage: Our paint offers outstanding coverage and color saturation, guaranteeing a seamless match to the original factory paint, thus maintaining the integrity and value of your vehicle.

Precision Matching: With its advanced formulation, this paint ensures that the refinished area is indistinguishable from the rest of the car, reflecting the highest standards of automotive refinishing expertise.

Ideal for professional use, our 2K High Density Extreme White Automotive Refinish Paint is the choice for those who demand nothing but the best in vehicle restoration. Experience the difference with a paint that not only restores but elevates the appearance of your vehicle to new heights of excellence.

product description:

Product Name:	P-201 High Density Extra White	Specifications:	1L/4L/5L
Features:	Durable, high covering power, high sun protection	Scope of application:	Cars, ships, vehicle, tanks
Color:	White	VOC	low
Drying time::	surface drying time is 2 hours, actual drying time is 24 hours	Mixing ratio:	paint:curing agent:thinner=2:1:0.3
Storage method:	Store in a cool, dry, ventilated and dark place	Sales scope:	global

construction substrate:	A. Original paint layer;	B. Old car paint film;	C. Intermediate paint film; Note that the construction substrate needs to be carefully polished, the surface is dry and in good condition		
Substrate treatment:	Before spraying the substrate, the substrate must be cleaned, degreased with degreaser, and polished with 800#~1000# sandpaper. Clean it after polishing, and use degreaser to remove oil again.				
Construction ratio:	Temperature 15 Color paint 100 parts MK12X quick-drying hardener agent 50 parts MK602 quick-drying thinner 15-30 parts		Temperature 15 -30 Color paint 100 parts P-12X standard hardener 50 parts P-602 standard diluent 15-30 parts		
	Temperature 30 Color paint 100 parts 12X slow drying hardener 50 parts 602 slow drying thinner 15-30 parts				
Viscosity:	16 seconds to 19 seconds, spray 4# viscosity cup (at normal temperature)				
Process::	The spraying process uses wet spraying to spray 2 to 3 layers on the surface of the substrate. Pay attention to leaving 5 to 10 minutes of evaporation time between each two layers. After spraying, the paint film needs to stand for 10 to 15 minutes. Then bake. Thickness in dry film state: 35~50 microns				
Re-construction:	After spraying, any areas with particles and sags should be wet-smoothed and polished with 2000# sandpaper after they are completely hardened.				
spray tools:	Gravity spray gun (top pot) 1.2-1.5mm 3-5kg/cm2 Suction spray gun (bottom) 1.4-1.6mm 3-5kg/cm2				
Use time after mixing:	After mixing the components, they need to be used within 4 hours				
Usage amount:	The thickness of a single coating is 35 microns. The paint is calculated based on a conversion rate of 70%. The theoretical value of the mixed paint spray area is: 8 square meters/liter, and the original unmixed 13 square meters/liter.				
Drying time:	ambient temperature	Non-stick time	Dry to touch time	Available assembly time	Complete drying time
	Normal temperature 25	40 minutes	2 hours	9 hours	6 days
	Bake at 70	5 minutes	10 minutes	25 minutes	50minutes
Product expiration date:	Validity period of 1-3 years, the product should be placed in a cool and dry place at 20				
Product packaging specifications:	1L×12 cans/box; 4L×4 cans/box;5Lx4 cans/box				

Key Advantages:

Robust Durability: The 2K system provides a protective layer that stands up to the rigors of the road, including UV radiation, acid rain, and general wear and tear.

Exceptional Resistance: Our paint is engineered to resist abrasion, corrosion, and scratches, maintaining the vehicle's showroom-fresh look.

Pricing and Availability:

The cost of Meklon's high-quality 2K High Density Extreme White Automotive Refinish Paint is reflective of its superior performance and quality assurance. Pricing is determined by net weight and capacity, with standard packaging at 1.2KG/can and 12 cans per carton. For precise pricing details, we encourage you to reach out to our knowledgeable sales team.

Expert Consultation:

To ensure you receive the most accurate pricing and tailored advice, we recommend consulting with a professional or our authorized dealer. Our expert staff, including Wayne, are available to assist you with your inquiries and provide personalized service.

Contact Us:

If you're ready to elevate your automotive refinishing to the next level, please contact Wayne directly for further information:

Wayne: +8613392100968

We look forward to helping you achieve outstanding results with Meklon's 2K High Density Extreme White Automotive Refinish Paint.

Product display:



Guangzhou Meklon Chemical Technology Co., Ltd.



+8613392100968



Meklonpaint@gzmeklon.com



refinishcarpaint.com

Room 1309, Tower B, Jiada International, Guangyun Road, Baiyun District, Guangzhou City, Guangdong Province